

The OWM

The Optical Wavelength Manager (OWM) is a cost-effective solution for optical monitoring of DWDM networks—including DWDM optical power, wavelength, and OSNR.

The Digital Lightwave Optical Wavelength Manager™ (OWM™)—available in 50 GHz or 100 GHz configurations—is the first shelf-level, intelligent sub-system for centralized management of remote DWDM wavelengths that can also be used as a portable device for field use.

The OWM, distributed in critical nodes throughout the network, provides the data necessary to assess the integrity of the optical transport layer in real time. This makes pre-emptive optical performance monitoring possible, which enables new revenue-generating opportunities—such as differentiated services based on wavelength-defined SLAs.

The OWM is network-ready and web-enabled for local or remote monitoring from a Network Operations Center (NOC). Using as little as a 1% tap, the OWM is designed for non-intrusive monitoring in Central Offices (COs) and POPs in optical switch, cross-connect, add-drop or amplifier monitoring applications. The OWM is based on a highly reliable solid-state optics design with no moving parts. Since the OWM is

not a scanning device and views all channels simultaneously, it is capable of monitoring up to 100 DWDM channels, all in 10 ms. The OWM accurately delivers all of the information needed to determine an optical channel's integrity, including power, wavelength, and Optical Signal to Noise Ratio (OSNR). It also provides automated alarm thresholds, data logging, system baselining, and a power tilt measurement. The OWM management interfaces include: SNMP v1/v2, TL1 or a Java-based GUI.

The OWM can also be configured with an optional integrated optical fiber switch that allows 2, 4 or 8 fibers to be monitored, and is automated to monitor one fiber at a time. This switch enables the OWM to be economically cost-shared across multiple fibers, and to be used in unmanned sites to reduce dependence on an onsite workforce.



Optical Wavelength Manager (OWM)

The OWM

The Optical Wavelength Manager (OWM) is a cost-effective solution for optical monitoring of DWDM networks—including DWDM optical power, wavelength, and OSNR.


Features:

- Monitoring 50-100 (depending on configuration) DWDM channels simultaneously
- Centralized remote monitoring over Ethernet
- Multivendor DWDM system monitoring from a single console interface
- Integrated multifiber monitoring
- Ultra-high dynamic range
- Instantaneous (10 ms) data acquisition
- Highly accurate without sacrificing speed
- Automated alarm threshold setting and peak detection
- Feature-rich point-and-click Graphical User Interface (GUI)
- Rack-mountable and/or field-pack portability

Applications:


- New revenue-generating wavelength-defined SLAs
- Telecom DWDM access, core, and long-haul networks:
 - Remote monitoring of manned and unmanned sites
 - Baseline and benchmarking of DWDM systems
 - DWDM system commissioning, and DWDM field troubleshooting and maintenance
 - Pre- and post-optical amplifier monitoring
 - Baseline and benchmarking of DWDM systems
 - HFC DWDM networks (100-GHz configuration)
 - Enterprise access and Storage Area Networks (100-GHz configuration)
- DWDM bench top testing

OWM GUI



Spectrum View/Peak View

- Data table for all peaks: power, wavelength and OSNR
- Bar graph views of spectral peaks
- Line views of spectrum and noise floor
- Zoom capability for more details
- Used to commission/turn-up new systems
- Used to baseline/benchmark systems

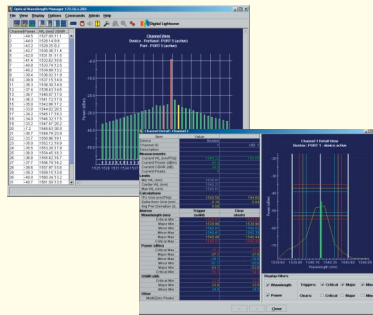

Channel View/Alarm View

- Bar graph display or user-defined channels
- Data table for all channels: power, wavelength and OSNR
- Point-and-click for individual channel information (power, wavelength, OSNR)
- User-definable, wavelength and OSNR channel alarm thresholds
- Color-coded graphical and tabular displays of minor, major, and critical alarms settings



Logging View

- Individual channel display of power, wavelength and OSNR over time
- Displays performance history of all channels
- User-defined timeframe
- Single-screen display of channel power, wavelength and OSNR
- Identifies network performance trends
- Enables pre-emptive fault detection/isolation
- Records performance history of all channels

Specifications are subject to change without notice.



www.Lightwave.com

Americas
Corporate Headquarters
5775 Rio Vista Drive
Clearwater, FL 33760
Toll free: +1 877 442 DIGL
T: +1 727 442 6677
F: +1 727 449 7352

Ordering Information For ordering and pricing information, including options and accessories, call +1 727 442 6677 or visit www.lightwave.com.

Digital Lightwave provides industry-leading products, technologies, and services for deploying and managing communications networks. With a presence in more than 80 countries, Digital Lightwave enables customers to successfully implement global communications networks worldwide. To find the nearest sales office, please visit www.lightwave.com.

© 2006 Digital Lightwave, Inc. All rights reserved. Digital Lightwave, its logo, Network Access Agent, Optical Wavelength Manager and OWM are trademarks or registered trademarks of Digital Lightwave, Inc. All other company and product names are trademarks of their respective owners.



CO401381A